FISHER & PAYKEL

TECHNOLOGIES



Direct Drive Motor Specification

Motor Model Number MB17G


| PARAMETER | VALUE | COMMENT |
|--|--|--|
| GENERAL | | |
| Motor type | 3-phase brushless permanent-magnet Outer rotor | 27 stator poles, 36 rotor poles Sinusoidal Back-EMF wave shape Aluminium wire and Ferrite magnet |
| Rotor position sensor (RPS – optional) | N/A | Vector sensorless control |
| Ambient temperature | Operating temp: -10°C to +40°C Storage temp: -40°C to +60°C | at 85% RH |
| Total motor mass | 3.7 kg | |
| MOTOR FUNDAMENTALS | | |
| Ke - BEMF constant | 2.81 Vrms/rad.s-1 | Line to neutral, RMS Voltage |
| Kt – Torque constant | 8.43 Nm/A | |
| Km - Motor constant | 1.17 Nm/\sqrt{Watt} | |
| Inductance | 89.5 mH | Line to neutral inductance (includes self and mutual inductance) |
| NDICATIVE PERFORMANCE * / ** AT NOMINAL 230V _{RMS} | | |
| Speed – maximum | 1,600 rpm | * |
| Torque at 140 rpm | 19 Nm | * |
| Torque at 1,600 rpm | 2.4 Nm | * |
| Power output – at 140 rpm | 280 W | * at 19 Nm torque |
| Power output – at 1,600 rpm | 390 W | * at 2.4 Nm torque |
| Efficiency at 140 rpm | 45% | * at 19 Nm torque |
| Efficiency at 1,600 rpm | 65% | * at 2.4 Nm torque |

* Reference values using Fisher & Paykel motor control at 22 °C. Values may vary using different control board and different tests conditions

** Different performance levels might be achieved through motor customization to other applications.

Pull Down curve at 230V 50Hz

Reference curve using Fisher & Paykel Components and Technology control board

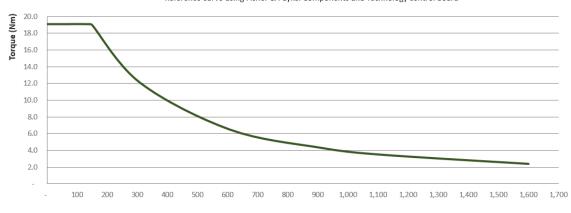

Speed (rpm)

Copyright © 2015 Version 3.0 FISHER & PAYKEL

Page 1/2

FISHER & PAYKEL


TECHNOLOGIES



Direct Drive Motor Specification

Motor Model Number **MB17G**

OVERALL DIMENSIONS ***

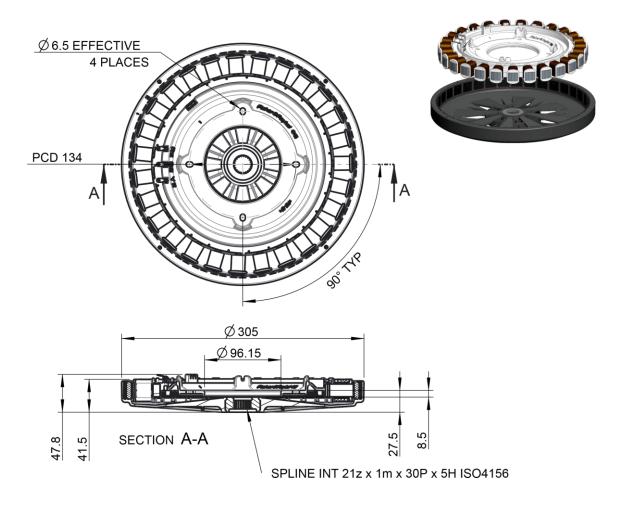

*** All dimensions in mm

Copyright © 2015

Version 3.0